

Technical Product Specification

Stainless Steel Gravity Louvre: GVSS100, GVSS125, GVSS150 & GVSS200B

The GVSS range is designed to allow air flow to be released by opening the Louvres and then closing when not in use. This keeps the vent closed during wind, drafts and prevents pests and vermin from entering the system.

The Louvre is made from quality 316 Marine Grade Stainless Steel. The Louvre also complies with BAL40 bushfire rating as the vent is supplied with a cinder mesh insert.

Extra features include:

- > Screws and rubber seal included


**Items marked with an asterisk are constructed from 304-grade stainless steel*

| Model | Description | Colour |
|-----------|-----------------------------------|--------|
| GVSS100 | Gravity Louvred Marine SS - 100mm | Silver |
| GVSS125 | Gravity Louvred Marine SS - 125mm | Silver |
| GVSS150 | Gravity Louvred Marine SS - 150mm | Silver |
| GVSS200B* | Gravity Louvred SS - 200mm (Bulk) | Silver |




Mesh features:

The diameter of the wire is 0.2mm
16 holes per square centimeter



Being aluminium constructed our cowls comply to BAL40 (Bush Attack Level 40) when used with supplied cinder mesh insert

Dimensions

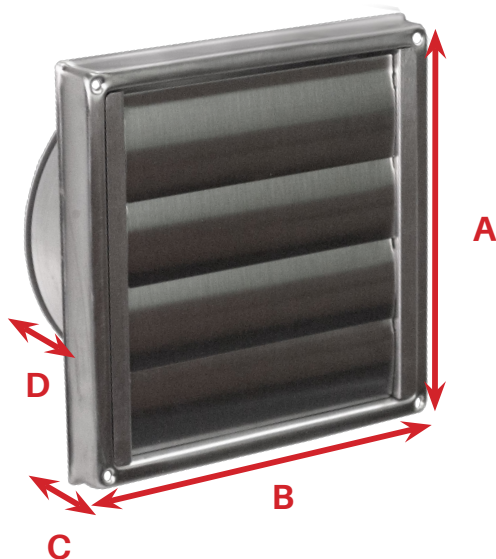

| Model | A(mm) | B(mm) | C(mm) | D(mm) |
|----------|-------|-------|-------|-------|
| GVSS100 | 150 | 150 | 15 | 52 |
| GVSS125 | 180 | 180 | 20 | 52 |
| GVSS150 | 180 | 180 | 20 | 62 |
| GVSS200B | 260 | 260 | 20 | 72 |

| Part No. | Carton Qty |
|-----------------|------------|
| GVSS100 | 3 |
| GVSS125 | 3 |
| GVSS150 | 3 |
| GVSS200B | 12 |