

Technical Product Specification

Stainless Steel Gravity Louvre: GVSS100, GVSS125, GVSS150 & GVSS200B

The GVSS range is designed to allow air flow to be released by opening the Louvres and then closing when not in use. This keeps the vent closed during wind, drafts and prevents pests and vermin from entering the system.


The Louvre is made from quality 316 Marine Grade Stainless Steel. The Louvre also complies with BAL40 bushfire rating as the vent is supplied with a cinder mesh insert.

Extra features include:

- > Screws and rubber seal included

**Items marked with an asterisk are constructed from 304-grade stainless steel*

Model	Description	Colour
GVSS100	Gravity Louvred Marine SS - 100mm	Silver
GVSS125	Gravity Louvred Marine SS - 125mm	Silver
GVSS150	Gravity Louvred Marine SS - 150mm	Silver
GVSS200B*	Gravity Louvred SS - 200mm (Bulk)	Silver




Mesh features:

The diameter of the wire is 0.2mm
16 holes per square centimetre

Being stainless steel constructed our vents comply to BAL40 (Bush Attack Level 40) when used with supplied cinder mesh insert.

Dimensions

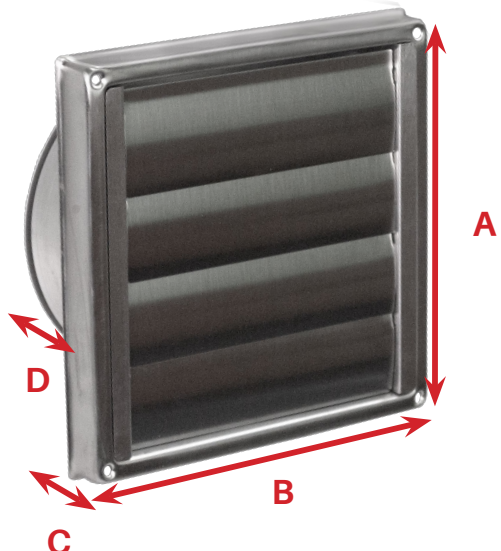

Model	A(mm)	B(mm)	C(mm)	D(mm)
GVSS100	150	150	15	52
GVSS125	180	180	20	52
GVSS150	180	180	20	62
GVSS200B	260	260	20	72

Part No.	Carton Qty
GVSS100	3
GVSS125	3
GVSS150	3
GVSS200B	12